


Swim Display, Inc.

Electronic Scoreboard Specifications

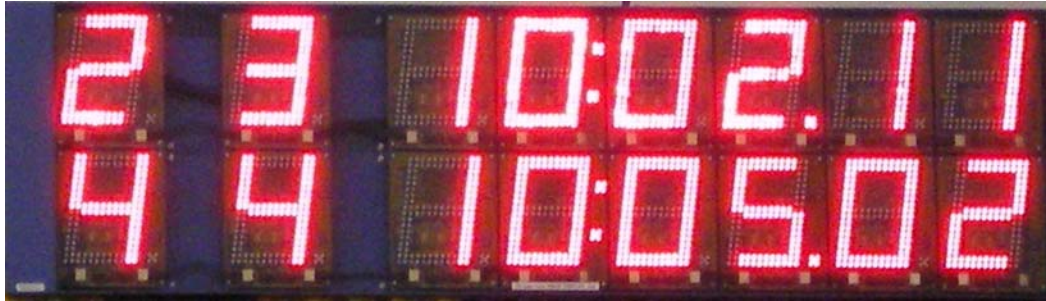

Digit Arrangement

- Each display unit has two lines, with up to nine digits on each line.

Control

- Swim Display Scoreboards are controlled by Colorado Time Systems' System 5 or later or Omega/Swiss Timing Ares 21 system timing consoles. Colorado-compatible timing interfaces such as Daktronics and IS Time may also be used. An unlimited number of scoreboards can be controlled by a single timing console.

Dimensions

- 68" wide X 19¼" high X 1¼" deep

Weight

- 25 pounds

Power

- 110 – 125 or 220 – 240 V AC
- 10 Watts blanked
- 100 Watts typical
- 200 Watts maximum



Installation

- Hangs on two screws, placed 48" apart.

Features

- Light and portable; can be shared between clubs or pools.
- Simple to use – just plug in power and data cable.
- Simple installation – no additional cost.
- 'E' for event and 'H' for heat, if display is configured to display event and heat
- Tenths of seconds are displayed during the race.
- Each line can alternate between up to four displays. (For example lanes 1 to 4.)
- Compatible with Colorado Time Systems timing consoles (System 5, System 6)

Swim Display, Inc.

Toll free: (866) 450-7229

www.swimdisplay.com sales@swimdisplay.com